

Free Oxygen Budget of a Polluted Tropical River

Uday Bhan P and Anil K Dwivedi*

Pollution and Environmental Assay Research Laboratory (PEARL), Department of Botany, DDU Gorakhpur University, Gorakhpur-273 009, Uttar Pradesh, India

*Corresponding author: Dwivedi AK, Pollution and Environmental Assay Research Laboratory (PEARL), Department of Botany, DDU Gorakhpur University, Gorakhpur-273 009, Uttar Pradesh, India, Tel: 09415695331; E-mail: anil.k.dwivedi@gmail.com

Rec date: Jan 21, 2016; Acc date: Apr 07, 2016; Pub date: Apr 12, 2016

Copyright: © 2016 Prajapati UB, et al. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

Abstract

Rivers are highly vulnerable water bodies to pollution due to their roles in assimilating or carrying off the municipal and industrial wastewater and run-off from agricultural land in their vast drainage basins. This paper analyzed the effluents discharged from industries contain chemicals which directly affect the parameters of the water. Present study deals with the investigation of monthly as well as seasonal variations of selected parameters in river Ami, which is a prime river in Gorakhpur, India. BOD 5 test measures the oxygen demand biodegradable pollutants whereas the COD tests measure the oxygen demand of oxidizable pollutants. These tests have its widest application in measuring waste loadings to treatment plants. The maximum value of BOD 5 was recorded to be 188 mg/l while COD was recorded to be 370 mg/l during summer and DO was completely absent during most part of the year.

Keywords: River Ami; Industrial effluent; DO; BOD; COD

Introduction

River Ami a tributary of river Rapti originated from Sikhra tal near Hallur (Tehsil-Dumariyaganj) of Siddarthnagar district and passes through the border of two adjoining district Siddarthnagar and Basti [1,2]. Its rout also includes Sant Kabirnagar and Gorakhpur districts of Uttar Pradesh in India. It is one of the ancient rivers in India and initially the river was called Anoma [3]. During the course of 90 km it receives waste and effluent from many large and small industries, basically distilleries and paper industries [4]. One of the main reasons of pollution of surface water in our country is discharge of untreated sewage [5,6]. Sewage contain large amount of organic material that can be oxidized by microorganisms so it is called oxygen demanding waste. Due to degradation of organic compounds, leads to Oxygen depletion in the water bodies which effect or even kills aquatic life forms. The waste produced by industries like dairy, tannery, distillery, Oil refinery, textile, coal and synthetic rubber etc. are highly toxic. According to Valipour [7] depth of water level in drain below soil surface is introduced as the most effective parameter between all of the drainage parameters for drain discharge. Inorganic and synthetic organic pollutant caused several adverse effects on the life of the aquatic system [8,9].

Dissolved Oxygen (DO) is the amount of oxygen gas that is dissolved into water by any source. It is a measure of the degree of pollution by organic matter, the destruction of organic substances as well as the self-purification capacity of the water body [10]. Biochemical Oxygen Demand (BOD) is a measure of oxygen that would be needed by the microorganism to decompose the organic and inorganic pollutants in polluted water. Chemical Oxygen Demand (COD) is measure of oxygen consumed during the oxidation of the oxidizable organic matter by strong oxidizing agent. The BOD/COD ratio is a parameter of great importance for quantification of

biodegradability of a contaminated effluent [11]. Standards are necessary for controlling the polluted water resources so that it would continue to be suitable for man and the aquatic system. Standard of different category of water has been prescribed by different health agencies [12]. Water quality standard of some agencies is given in Table 1.

Some studies in this direction have been done, but the studies are superficial because most of the studies show that many parameters have been considered at a time. Therefore, deep knowledge regarding important factors could not be highlighted and paucity exists. Therefore, this study has been designed to focus on the parameters related to oxygen content in water.

Materials and Methods

River Ami in India was selected for this study on the ground of its historical, economic and its geography. For detail investigation of the river, five study sites (In four different districts) on the basis and varying intensity of industrial effluents discharged and the pollution load were located, as given in Table 1 and shown in the Figure 1. The study site at Lahurikhurd in district Siddarthnagar was marked as the control site, as no prominent source of pollution was present in the upstream of this study site. For true representation, the water samples were collected early in the morning from three points at each study site, first along the mid-stream followed by the point close to the two banks during June 2007 to May 2008. The analyzed water quality parameters include DO, BOD 5 and COD as prescribed by APHA [13]. Sampling was conducted fortnightly but for the ease of convenience, the average values are represented monthly and seasonally. The values had been subjected to statistical analysis also.

Study Sites	Location	Source of Pollution
SS 1	Lahurikhurd, Dist-Siddharthnagar	Marked as control site, no prominent source of pollution.
SS 2	Rudhauri, Dist-Basti	Effluents from a sugar factory.
SS 3	Maghar, Dist-Sant kabirnagar	Effluent from a paper industry.
SS 4	Chhatai bridge, Dist-Gorakhpur.	Effluents from many small and large scale industries situated in GIDA (Gorakhpur Industrial Development Area).
SS 5	Kauriram, Dist-Gorakhpur	This site was selected as a study site to evaluate the change in water quality incurred after traveling 21 Km. distance from the last source of pollution i.e., the study site 4.

Table 1: Detail of the Study sites.

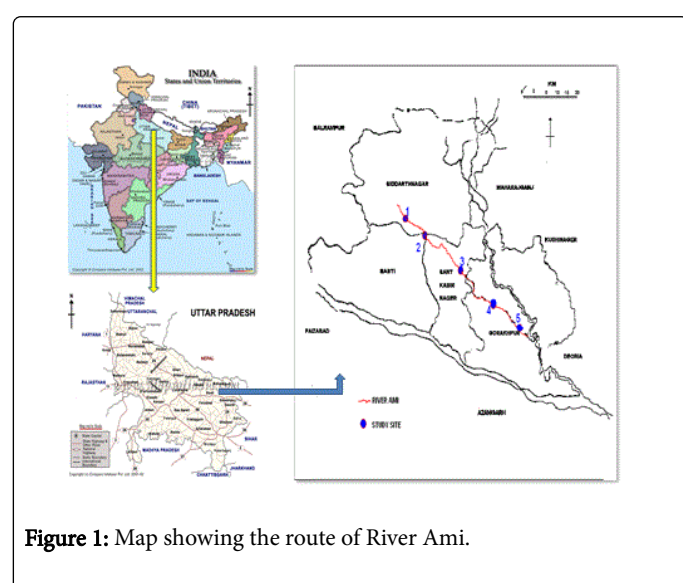


Figure 1: Map showing the route of River Ami.

Results and Discussion

Monthly variation in DO of water in the river Ami is given in Table 2. Comparative study of the river water of all the sites show that maximum DO 6.8 mg/l was recorded during August at

site 1 while most of the study sites show DO was completely absent during most part of the year. Seasonal variation of DO in the water of river Ami (Figure 2) show that the higher DO remains during rainy season followed by winter and the least DO was during summer season. The study of site-wise variation in DO show that the highest DO during most part of the study was at the study site 1. However, the DO was nil during several month in most of the sites which show negative correlation with all the parameters (Table 4).

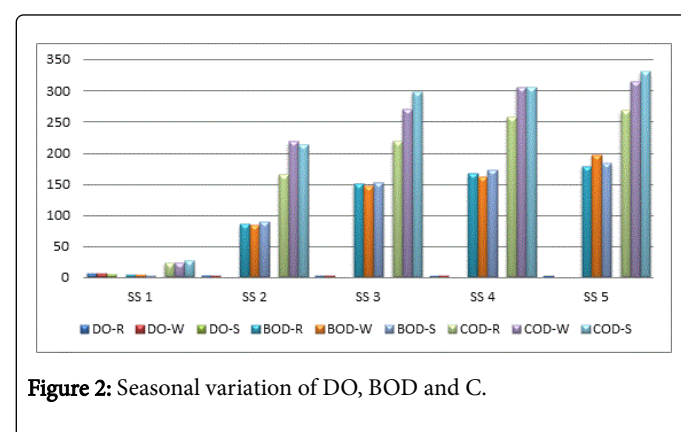


Figure 2: Seasonal variation of DO, BOD and C.

Month	Temp	Site 1			Site 2			Site 3			Site 4			Site 5		
		DO	BOD5	COD	DO	BOD5	COD	DO	BOD5	COD	DO	BOD5	COD	DO	BOD5	COD
June	37.7	4.2	3.6	24	0	80	268	0	148	234	0	161	258	0	186	262
July	35.2	5.2	3.4	21	0	82	188	2.1	146	210	2.3	160	241	0	185	258
Aug	34.4	6.8	4.2	27	3.8	83	185	3.4	153	215	2.5	171	268	2.2	181	287
Sept	34.2	5.4	4.1	25	0	91	95	0	158	211	1.3	168	240	0	172	265
Oct	32.2	5.1	4	19	0	85	192	0	147	241	0	165	272	0	176	262
Nov	30.4	4.8	3.6	23	2.1	88	218	0	141	265	0	158	312	0	168	322
Dec	26.8	6.2	3	22	3.2	78	228	2.7	145	272	1.4	162	317	0	179	320
Jan	21	6.1	3.4	20	1.3	90	208	0	144	282	0	165	312	0	182	308

Feb	23	5.3	3.8	29	0	79	217	0	157	262	0	164	282	0	180	312
March	23.5	5.4	3.2	30	0	86	262	0	155	312	0	178	251	0	174	330
April	24.4	5.7	3.1	28	0	98	285	0	152	320	0	176	355	0	185	370
May	40	4.6	3.3	26	0	92	278	0	156	326	0	174	368	0	188	360

Table 2: Monthly variation of DO, BOD5 and COD.

Physical process that affects DO concentrations is the relationship between water temperature and gas saturation. During the summer months in the warmer top portion of a water bodies, the total amount of oxygen present may be limited by temperature. The amount of oxygen that can be dissolved in water decreases, as the content of soluble salt increases. Also, the lower the temperature, the more will be the DO. The saturation level of DO is 14-15 mg/l at 0°C in fresh and clean water. With the rise in temperature value of DO reduces and reaches to 0 mg/l at 100C [14-16]. According to Rao [17] if the ratio of BOD and COD is 0.8 or higher, it indicate that the water is highly amenable to biochemical treatment, while the lower ratio indicate that the samples are not favorable to biological treatment. According to Ice and Sugden [18], DO concentrations are critical to aquatic communities and are an important measure of water quality condition in streams. In aquatic ecosystems except during active photosynthesis period in day, DO is usually a critical factor and at times it may cause anoxia (oxygen deficient) and death of aquatic organisms. In highly polluted systems the oxygen required for biochemical purposes exceed far more than the usual and rapid depletion in DO occurs [19,20].

Comparative study of all the sites shows that in the river Ami, the minimum BOD of water during December at site 1 and maximum BOD during May at site 5. Seasonally, BOD 5 was found to be highest during summer season followed by rainy and winter season at all the sites. Jain et al. and Bruce et al. [21,22] reported similar result. The statistical analysis of BOD5 and COD show positive correlation with all the parameters except DO. Monthly variation in BOD5 of water in the river Ami is given in Table 3. Among all the sites, the maximum value of BOD5 was recorded to be 188 mg/l at the site 5 during May 2008. The minimum BOD5 was 3.0 mg/l at site 1 during December 2007.

Parameters	BIS	ISI	UPPCB	USPHS
DO (mg/l)	>5.0	>5.0	--	>4.0
BOD5 (mg/l)	<3.0	30	30	--
COD (mg/l)	<20.0	<20	250	--

Table 3: Standards of water quality. Standard of different category of water have been prescribed by different health agencies. BIS=Bureau of Indian Standard; ISI=International System of Units; UPPCB=Uttar Pradesh Pollution Control Board; USPHS=United State Public Health service.

Seasonal variation of BOD 5 in the water of river Ami (Figure 2) show that the higher BOD5 remains during summer followed by rainy and the least was during winter season. The study of site-wise variation in BOD 5 show that the highest BOD 5 during most part of the study was at the study site 5 followed by the study site 4, 3 and 2. However, the least value was recorded at the study site 1. BOD 5 shows positive

correlation with all the parameters except the DO, which shows negative correlation at 0.01% level of significance (Table 4).

	DO	BOD5	COD
DO	+1.0000		
BOD5	-0.9275	+1.0000	
COD	-0.7906	+0.9190	+1.0000

Table 4: Correlation between DO, BOD and COD. P<0.001 (0.1% Level of significance for all values).

Higher BOD means more microorganisms, which in turn mean the presence of more organic waste. Due to heavy load of organic matter in water, it is bound to have a good growth of decomposer organisms on them, which would demand oxygen heavily for their respiration. This demand would exceed the oxygen production and re-aeration rate leading to DO deficiency and anaerobic conditions. High BOD levels indicates decline in DO because the oxygen that is available in the water is being consumed by the bacteria leading to the inability of fish and other aquatic organisms to survive in the river [23].

Monthly variation in COD of water in the river Ami is given in Table 2. Among all the sites the maximum COD was recorded to be 370 mg/l at the site 5 during April 2008. The minimum COD was 19 mg/l at site 1 during October 2007. The study of seasonal variation in COD (Figure 2) show that the highest COD was during summer season, followed by rainy and the least COD was during winter season. COD during most part of the study was at the study site 5 followed by the study site 4, 3 and 2. However, the least value was recorded at the study site 1. COD shows positive correlation with all the parameters except the DO, which shows negative correlation at 0.01% level of significance (Table 4).

The higher values of COD and lower values of DO in summer are influenced by various factors. Higher rainfall and river-flow cause the wash of organic matter into the surface water, which decreases the concentration of dissolved oxygen with biodegradation, while the increase in temperature causes a decrease in oxygen solubility, thus causing a further reduces the DO concentrations. In addition, as the amount of available DO decreases, undergoes anaerobic fermentation processes leading to formation of organic acids [24,25]. Jamil et al. [26] reported that a high ratio of DO (>0.5) indicates good biodegradability in the water while a ratio less than 0.3 is considered low, and corresponds to low biodegradability of the organic material present in the wastewater.

Conclusion

From the result of study the levels of DO, BOD5 and COD were higher than WHO, CPCB etc. regulatory limits for discharged of

wastewater into river Ami. Therefore, the discharged of industrial and municipal waste would raise the level of these contaminants which make the river unsafe for usage for residence along the river for forming activities. DO show negative correlation with all the parameters, proving that the DO is inversely proportional to the parameters of pollution. Decreasing the value of DO and increasing the value of BOD 5 and COD indicate the higher concentration of organic compound in water. Reduction in value of BOD 5 and COD and increasing value DO during rainy season was due to addition of rain water. Based on the result obtained the wastewater should be monitor strictly by relevant agencies in order to prevent environmental pollution and reduced health hazards caused by activities of wastewater.

References

1. Dwivedi AK, Prajapati UB, Singh R, Hasan H, Singh J (2007) Study of pre and post monsoon water quality in a tropical river Ami. *Modern Journal of Life Sciences* 7: 161-166.
2. Prajapati UB, Dwivedi AK (2010) Impact of industrial waste on the water quality of tropical river Ami. *Journal of Applied and Natural Science* 3: 219-223.
3. Law BC (1972) Historical geography of Ancient India. Pub. UP Hindu Grant Academy Lucknow.
4. Dwivedi AK, Prajapati UB (2011) Pollution in tropical river Ami-An experimental approach. Lambert Academic Publisher, AG & Co. KG, Germany.
5. Vrushali S, Kaustav C (2014) Sewage treatment and reuse-a step towards water conservation. *International Science Journal* 1: 15-22.
6. Prajapati UB, Dwivedi AK (2010) River water versus water pollution. In: Dwivedi AK, Tripathi SC (eds.) *Environment and Biodiversity, Environmental pollution and risk to biodiversity*. Lambert Academic Publisher, AG & Co. KG, Germany, pp: 131-154.
7. Valipour M (2012) Effect of Drainage Parameters Change on Amount of Drain Discharge in Subsurface Drainage Systems. *Journal of Agriculture and Veterinary Science* 1: 10-18.
8. Dwivedi AK, Prajapati UB, Shashi S (2007) Wastewater and its management. *Indian Science Cruiser* 21: 36-40.
9. De la Torre ML, Rodas SD, Grande JA, Gomez T (2011) Relationships between pH, colour and heavy metal concentrations in the Tinto and Odiel rivers (Southwest Spain). *Hydrology Research* 41: 406-413.
10. Joseph C, Fanna AI, Abdulrahman, Yusuf E (2010) Physical and Chemical Parameters in Abattoir Wastewater Sample, Maiduguri Metropolis, Nigeria. *The Pacific Journal of Science and Technology* 11: 640-648.
11. Prajapati UB (2010) Studies on the water quality of river Ami and its ecomanagement. Pollution and environmental research laboratory (PEARL), Department of Botany, DDU Gorakhpur University, Gorakhpur.
12. World Health Organization (2004) Guidelines for Drinking Water Quality. 3rd edn. Vol. 1. Recommendation Geneva, Switzerland.
13. APHA (1998) Standard methods for the examination of water and waste water. 20th edn. American Public Health Association, Washington DC, USA.
14. Clean Water Team (2004) Dissolved Oxygen Fact Sheet, FS-3.1.1.0 (DO) In: *The Clean Water Team Guidance Compendium for Watershed Monitoring and Assessment, Version 2.0*. Division of Water Quality, California State Water Resources Control Board (SWRCB), Sacramento, CA.
15. Sharma P, Gupta S (2014) Study of amount of Oxygen (BOD, OD, COD) in water and their effect on fishes. *American International Journal of Research in Formal, Applied & Natural Sciences* 7: 53-58.
16. Water on the Web (2015) Dissolved Oxygen: [<http://www.waterontheweb.org/under/waterquality/oxygen.html>], Accessed on: June 27, 2015.
17. Rao CS (2006) Environmental pollution control engineering. New age international (P) Limited Publication, New Delhi, India.
18. Ice G, Sugden B (2003) Summer dissolved oxygen concentration in forested streams of northern Louisiana. *Southern Journal of applied Forestry* 27: 2-99.
19. Chen GH, Leong TM, Liu J, Hang JC (1999) Study of oxygen uptake by tidal river sediment. *Water research* 22: 2905-2912.
20. Hamilton D, Parparov A (2010) Comparative Assessment of Water Quality with the Trophic Level Index and the Delphi Method in Lakes Rotoiti and Rotorua, New Zealand. *Water Quality Research Journal of Canada* 45: 479-489.
21. Jain V, Jain P (2004) BOD and COD monitoring in waste water sample at Bhopal (MP). *Oriental J Chem* 20: 419-420.
22. Bruce K, Munkittrick KR, Portt CB, Hedley K, Culp JM, et al. (2005) Environmental Effects Monitoring, Biological Criteria for Municipal Wastewater Effluent Monitoring Programs. *Water Quality Research Journal of Canada* 40: 374-387.
23. Waziri M, Ogugbuaja VO (2010) Interrelationships between physicochemical water pollution indicators: A case study of River Yobe-Nigeria. *Am J Sci Ind Res* 1: 76-80.
24. Zhao J, Fu G, Lei K (2015) Water Quality Assessment and Apportionment of Pollution Sources of Selected Pollutants in the Min Jiang, a Headwater Tributary of The Yangtze River. *Hydrol Current Res* 6: 211.
25. Shashi S, Singh J, Dwivedi AK (2010) Numerical analysis of DO, BOD and COD in a polluted tropical river. *Columban J life Science* 11: 19-24.
26. Jamil TS, Ghaly MY, EL-Seesy IE, Souaya ER, Nasr RA (2011) A comparative study among different photochemical oxidation processes to enhance the biodegradability of paper mill wastewater. *Journal of Hazardous Materials* 185: 353-358.