

About Filtration in Some Tasks Underground Hydrodynamics

Bereslavsky Edward Naumovich*

Department of Physical and Mathematical Sciences, Saint Petersburg State University, St Petersburg, Russia

Abstract

Within the framework of the theory of plane steady filtration of an incompressible fluid according to the law Darcy, two schemes are considered that simulate filtration flows under a sheet pile Zhukovsky through ground array, underlain impenetrable basis or highly permeable pressure aquiferous horizon. For research influence evaporation or infiltration for free surface ground waters are formulated mixed boundary value problems of the theory of analytic functions, which are solved using Polubarinova-Kochina method. Based on these models, zone calculation algorithms have been developed saturation in cases where, during water movement, it is necessary to take into account the joint influence on picture currents such important factors How backup co sides impenetrable base or underlying highly permeable aquifer, evaporation or infiltration on free surfaces groundwater, soil capillarity.

Keywords: Filtration • Infiltration • Evaporation • Groundwater • Free surface • Tongue zhukovsky • Method Polubarinova-kochina • Comprehensive speed • Conformal display • Equations class fuchs

Introduction

The problem on the flow around a tongue was investigated for the first time by Joukowski NE [1], where the modified Kirchhoff method from the theory of jets was used for solving problems with a free surface and a special analytical function, which is widely applied in the theory of filtration, was introduced. After this publication, both the function and the problem, as well as the tongue, were named after Joukowski NE [1]. This study opened the possibility of the mathematical modeling of motions under the Joukowski tongue and initiated investigations of the specified class of filtration flows (see, for example, reviews [2,3]). At the same time, there are no studies devoted to special investigation of the effect of evaporation or infiltration on the pattern of motions. These important physical factors have been disregarded in exact analytical solutions of similar problems until now.

In this work, we studied the effect of evaporation or infiltration by the example of two schemes that arise in the flow around the Joukowski tongue. The first scheme corresponds to the case in which the soil layer is underlain to the entire extent by an impermeable basis and evaporation takes place from the free surface. In the second scheme, the underlying layer represents an entirely well permeable confined water bearing horizon and there is infiltration on the free surface.

We present a uniform technique of solving the problems, which enables us to take into account also other basic filtration characteristics in the investigation (the backup both from the side of the underlying impermeable basis and the highly permeable confined water bearing horizon and the soil capillarity) and to estimate the joint effect of these factors on the pattern of the phenomenon. Evaporation or infiltration on the free surface are studied using the Polubarinova-Kochina method [2,3] and the ways of conformal mapping [4,5] developed for regions of a special type [6]; in this case, the mixed multiparameter boundary value problems of the theory of analytical

*Address for Correspondence: Bereslavsky Edward Naumovich, Department of Physical and Mathematical Sciences, Saint Petersburg State University, St Petersburg, Russia, E-mail: eduber@mail.ru

Copyright: © 2023 Naumovich BE. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

Received: 01 September, 2023, Manuscript No. hycr-23-113110; Editor Assigned: 05 September, 2023, PreQC No. P-113110; Reviewed: 18 September, 2023, QC No. Q-113110; Revised: 23 September, 2023, Manuscript No. R-113110; Published: 30 September, 2023, DOI: 10.37421/2157-7587.2023.14.478

functions are solved. Taking into account the typical features of the flows under consideration makes it possible to present the solutions through elementary functions, which makes their use most simple and convenient. The results of numerical calculations are presented and the hydrodynamic analysis of the effect of evaporation or infiltration, as well as all physical parameters of schemes on the filtration characteristics, is given.

Materials and Methods

Flow around the joukowski tongue in the presence of a horizontal confining bed on a foundation (scheme 1)

We consider the 2D (in the vertical plane) steady filtration of a fluid in a homogeneous and isotropic soil layer of thickness T , underlain by a horizontal impermeable foundation (confining bed) under uniform evaporation of intensity ε ($0 < \varepsilon < 1$) from the free surface (Figure 1).

The flow is provided by the water inflow from the left-hand side of the flooding band AB with the time invariable fluid layer. The impermeable vertical screen in the form of the Joukowski tongue AF of S in length, the basis of which is located inside the layer (Figure 1), serves as the right-hand edge of the flooding band.

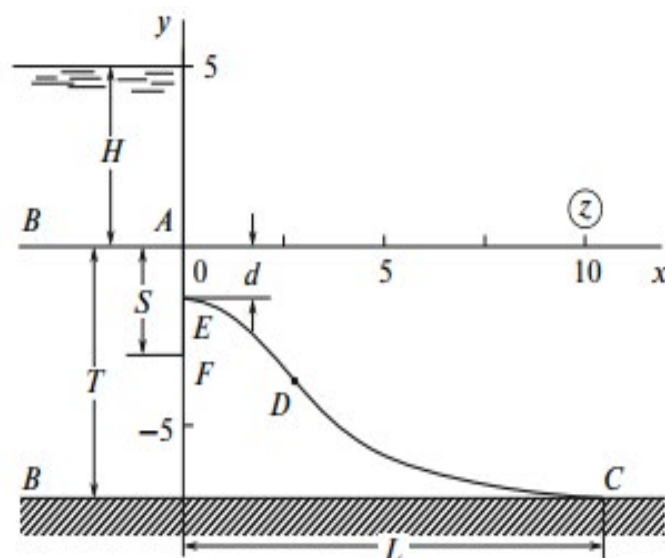


Figure 1. Flow pattern calculated at $\varepsilon=0.6$, $hc=0.5$, $T=7$, $S=3$ and $H=5$.

We introduce the complex motion potential $\omega = \varphi + i\psi$ (φ is the velocity potential and ψ is the stream function) and the complex coordinate

$z = x + iy$ referred correspondingly to κT and T , where $\kappa = \text{const}$ is the soil-filtration coefficient. The problem consists in finding the complex potential $\omega(z)$ as the function, which is analytical in the filtration region z and satisfies the following boundary conditions:

AB: $y=0, \varphi = -H$; BC: $y = -T, \psi = 0$;
 CDE: $\varphi = -y + hc, \psi = -\varepsilon x + Q$; (1)
 EA: $x=0, \psi = Q$, (1)

where hc is the static height of capillary rise of soil waters and Q is the desired filtration flow rate of the water. Assuming that CDE $x=L$ in the second condition in Eq. (1) for the portion CDE, we obtain:

$Q = \varepsilon L$. (2)

The problem is solved by using the Polubarinova-Kochina method [2,3], which is based on the analytical theory of the linear differential equations of the Fuks class [7].

We introduce an auxiliary canonical variable ζ and the functions $z(\zeta)$, which conformally maps the upper half-plane $\text{Im } \zeta > 0$ to the flow region z at the correspondence of points $\zeta_B=0, \zeta_C=1, \zeta_E=\infty$ and also the functions $d\omega/d\zeta$ and $dz/d\zeta$.

Determining the characteristic parameters of the last functions near the regular special points [2,7],

we find that they are the linear combinations of two branches of the following Riemann function [2]:

$$P \left\{ \begin{matrix} -\zeta_A & 0 & 1 & \zeta_D & \infty \\ -\frac{1}{2} & -1 & -\frac{1+v}{2} & 0 & \frac{3}{2} \\ -\frac{1}{2} & -\frac{1}{2} & -\frac{1-v}{2} & 2 & 2 \end{matrix} \right\} \zeta$$

$$= \frac{Y}{\zeta \sqrt{(\zeta + \zeta_A)(1 - \zeta)}} \quad (3)$$

$$Y = P \left\{ \begin{matrix} 0 & 1 & \zeta_D & \infty \\ 0 & 0 & 0 & -\frac{1+v}{2} \\ \frac{1}{2} & v & 2 & -\frac{v}{2} \end{matrix} \right\} \zeta$$

Where $\pi v = 2 \text{arc cot } \sqrt{\varepsilon}$ It can be seen that point $\zeta = -\zeta_A$ is the ordinary point for the function Y representing the last Riemann symbol. The following linear differential equation of the Fuks class with four regular special points corresponds to this symbol:

$$Y'' + \left(\frac{1}{2\zeta} + \frac{1-v}{\zeta-1} - \frac{1}{\zeta-\zeta_D} \right) Y' + \frac{v(1+v)\zeta + \lambda_0}{4\zeta(\zeta-1)(\zeta-\zeta_D)} Y = 0 \quad (4)$$

We consider the region of the complex velocity w (Figure 2) corresponding to boundary conditions (1). This region, which is represented by a circular quadrangle with two right angles, the angle of πv at the vertex C and a cut with the vertex at the point D , belongs to the class of polygons in polar grids [4-6]. Similar regions are quite characteristic for many problems of underground hydromechanics: in filtration from a mole sprinkler [8], in the flows of fresh waters in lenses formed above salty waters at rest during filtration from

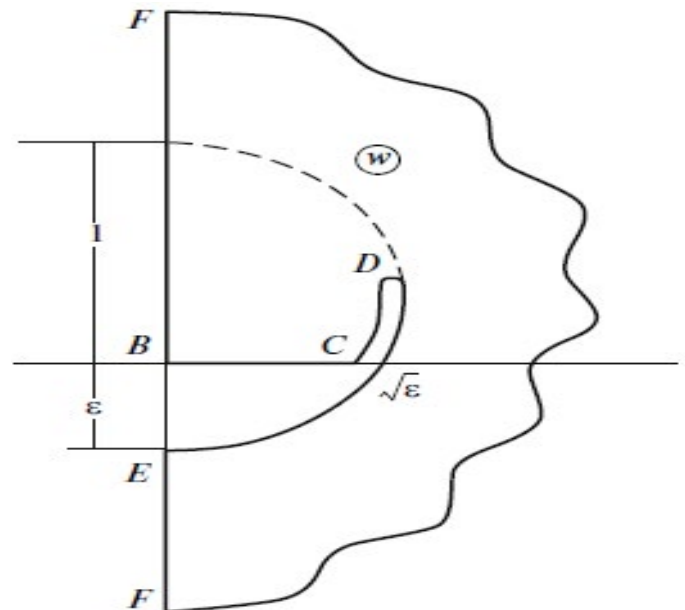


Figure 2. Regular of complex velocity w for scheme 1.

reservoirs and channels [9] and in the flow around the Joukowski tongue in the presence of salty upthrust waters [10] (see also [2,3]).

The replacement of variables $\zeta = \tanh 2t$ transfers the upper halfplane ζ into the horizontal semi-band

$\text{Re } t > 0, 0 < \text{Im } t < 0.5\pi$ of the plane t and the integrals Y of Eq. (4), which are constructed by the technique developed previously in [4-6], are transformed to the form

$$Y_1 = \frac{\cosh t \cosh vt + C \sinh t \sinh vt}{\cosh^{1+v} t}$$

$$Y_2 = \frac{\cosh t \cosh vt + C \sinh t \sinh vt}{\cosh^{1+v} t} \quad (5)$$

where $C = \cot f \cot vf$ a and f ($0 < a < f < 0.5\pi$) are unknown ordinates of the points A and F in the plane t .

Considering relations (3) and (5) and considering that $w = \frac{d\omega}{dz}$, we come to the dependences

$$\frac{d\omega}{dt} = \sqrt{\varepsilon M} \frac{\cosh t \sinh vt \Delta}{\Delta(t)}$$

$$\frac{dz}{dt} = M \frac{\cosh t \cosh vt + C \sinh t \sinh vt}{\Delta(t)}, \quad (6)$$

$$\Delta(t) = \sqrt{\sin^2 a + \sinh^2 t}$$

Where $M > 0$ is the scale constant of modeling.

Where λ_0 is the accessory parameter. We recall that the prototype ζ_D of the cut vertex D in Eq. (4) and also the accessory constant λ_0 remain unknown in the formulation of the problem.

The writing of representations (6) for different portions of the boundary of the region t with subsequent integration over the entire contour of the auxiliary region of the parametrical variable t results in the expressions for set S, T and H and the desired values of d and L ; the flow rate in this case is calculated from formula (2).

In Figure 1, we show the flow pattern calculated at $\varepsilon=0.6, hc=0.5, T=7, S=3$ and $H=5$. The results of calculations of the effect of determining physical parameters ε, hc, T, S and H on the sizes of d and L are listed in Table 1. The

Table 1. Results of calculations of the values of d and L with variation of ε, hc, S and H.

ε	d	L	h _c	d	L	S	d	L	H	d	L
0.2	0.14	18.39	0	2.396	8.05	3	2.234	8.38	3	2.885	7.06
0.4	1.463	11.31	0.25	2.315	8.21	4	2.392	8.05	4	2.559	7.72
0.8	2.759	6.72	1	2.073	8.7	5	2.519	7.79	7	1.912	9.02
0.9	2.965	6.13	2	1.751	9.35	6	2.626	7.57	8	1.912	10.32

analysis of the calculations and data in Table 1 allows us to make the following conclusions:

An increase in the height of rise due to capillary forces in the soil and the pressure in the pool, as well as the decrease in the evaporation intensity, the layer thickness and the tongue lengths result in decreasing value of d, i.e., to an increasing ordinate of point D of the exit of the depression curve from under the tongue. For example, according to Table 1, an increase of 4.5 times in the parameter ε corresponds to a variation by 4.7 times in depth d.

—The value of L of the fluid-spread width over the confining bed increases with the static height of the capillary rise of groundwater, the layer thickness and the pressure in the pool and with a decrease in the evaporation intensity and the tongue lengths. For example, it can be seen from (Table 1) that the width L increases three times with increasing parameter ε 4.5 times. If we introduce the dimensionless value of $h(d) = \frac{h(d)}{h(s)}$, describing the relative height of the groundwater rise behind the tongue for all calculation variants, it proves that $d > 0$ and, hence, $0 < h < 1$, the highest and lowest values of h are achieved precisely with the variation of evaporation intensity: $\max h(d) = 0.95$ at $\epsilon = 0.2$ and $\min h(d) = 0.01$ at $\epsilon = 0.9$.

Results and Discussion

Flow around the Joukowski tongue in the presence of a highly permeable horizon containing confined underwaters on a foundation (scheme 2)

We consider now another limiting case arising in the problem of flow around the Joukowski tongue, when the soil layer is spread under an easily penetrable confined water-bearing horizon BC,

the pressure in which has a constant value of H0 and there is a uniform infiltration of intensity ε (0 ≤ ε < 1) on the free surface (Figure 3). Then far from the tongue (at x → ∞), the depression curve is horizontal and located at the height H0 above the water-bearing horizon. In this scheme, boundary conditions (1) on the portions AB and EA are retained and the conditions on the boundaries BC and CDE are replaced with the following:

$$BC: y = -T, \varphi = -H_0; \quad (7)$$

$$CDE: \varphi = -y - T, \psi = \epsilon x + Q.$$

The region of complex velocity w corresponding to boundary conditions (1), (7), which represents a circular triangle with two right angles and with a cut with the vertex at the point D, is shown in Figure 4. Similar polygons are quite typical in the drainage problems [11-13] under the motion of groundwater through dams with diaphragms [14,15], etc., for example, [2,3].

Usually such regions are transferred into rectilinear polygons with the help of inversion with the subsequent use of the Christoffel-Schwarz formula, which, as a rule, results in the solution through elliptical functions and integrals.

Contrary to these possibilities, we propose below a way based on the direct use of an equation of the Fuks type, the integrals of which are the trigonometric functions sine and cosine.

For this purpose, it is convenient this time to choose a different correspondence of points in the upper halfplane ζ:

$$-\infty = \zeta_D + \zeta_E = 0 < \zeta_A < \zeta_B < \zeta_C = 1 < \zeta_D = \infty$$

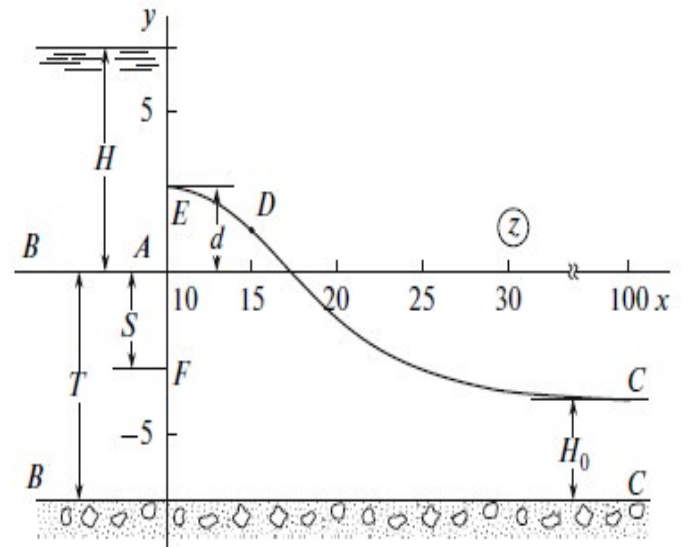


Figure 3. Flow pattern calculated at ε=0.6, T=7, S=3, H=7, H0=3 and xC=100.

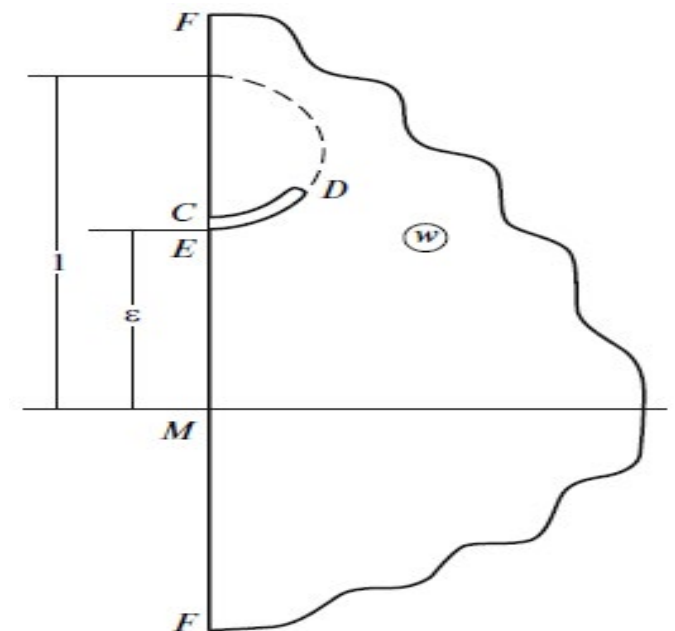


Figure 4. Region of complex velocity w for scheme 2.

Applying the Polubarinova-Kochina method, we find that, in this case, the functions and are the linear combinations of two branches of the following Riemann function [2,7]:

$$P \left\{ \begin{matrix} 0 & \zeta_A & \zeta_B & 1 & \infty \\ -\frac{1}{2} & -\frac{1}{2} & -1 & 2 & \zeta \\ 0 & -\frac{1}{2} & -1 & -\frac{1}{2} & 4 \end{matrix} \right\} = \frac{Y}{(\zeta_B - \zeta)(1 - \zeta)\sqrt{(\zeta_A - \zeta)}} \quad (8)$$

$$Y = P \left\{ \begin{matrix} 0 & 1 & \infty \\ 0 & 0 & -1 \\ \frac{1}{2} & \frac{1}{2} & -1 \end{matrix} \right\} \zeta$$

From consideration of the region of w and relation (8), it follows that the points $\zeta = \zeta_A$ and $\zeta = \zeta_B$ are the ordinary points for the function Y representing the last Riemann symbol. The linear differential equation of the Fuks class with three regular special points corresponds to it:

$$\zeta(1-\zeta)Y'' + \left(\frac{1}{2}-\zeta\right)Y' + Y = 0 \tag{9}$$

$$Y_1(\zeta) = F\left(-1, 1, \frac{1}{2}, \zeta\right), \tag{10}$$

$$Y_2(\zeta) = \sqrt{\zeta F}\left(-\frac{1}{2}, \frac{3}{2}, \frac{3}{2}, \zeta\right).$$

The replacement of variables $\zeta = \sin 2t$ changes the upper half-plane ζ into the vertical semiband $0 < \text{Re } t < 0.5\pi$, $\text{Im } t > 0$ of the plane t at the correspondence of vertices $tE=0$, $tC=0.5\pi$, $tD=\infty$ and integrals (10) are transformed to

$$Y_1 = \sin 2t, \quad Y_2 = \cos 2t. \tag{11}$$

Considering relations (8) and (11), we come to the desired dependences

$$\frac{d\omega}{dt} = -\varepsilon M \frac{\sin 2f \sin 2(t-m)}{\sin 2m\Delta(t)},$$

$$\frac{dz}{dt} = iM \frac{\sin 2(t-f)}{\Delta(t)}, \tag{12}$$

$$\Delta(t) = (\sin^2 b - \sin^2 t) \cos t \sqrt{\sin^2 a - \sin^2 t},$$

where m and f are the prototypes of the points M and F ($0 < m < f < a < b < 0.5\pi$) related as

$$\tan 2m \cot 2f = \varepsilon. \tag{13}$$

Unknown constants a , b , m and M are determined from the set of equations consisting of the expressions for S , T , H , H_0 and with fixation of the abscissa $\times C$ of the point C of the depression curve.

We note the limiting case of the flow related to the absence of infiltration, i.e., at $\varepsilon=0$. With considering the parameters m , f and ε from Eq. (13), the solution of the problem in the case when $\varepsilon=0$ follows from dependences (12) at $m=0$, i.e., when the points C and E of the depression curve in the plane w merge at the origin of coordinates with the point M of zero velocity. Thus, we obtained the solution of the problem considered for the first time by Vedernikov VV [13] but only with another method and in a different form, i.e., through conventional trigonometric functions (Table 2).

Equation (9) is the Gaussian equation [7]. Its canonical integrals in the vicinity of the point $\zeta=0$ are expressed through the hypergeometrical function $F(\alpha, \beta, \gamma, \zeta)$ [7] and have the following form in this case:

Table 2. Results of calculations of the values of d and h with variation of ε , S , H and H_0 .

ε	d	h	S	d	h	H	d	h	H_0	d	h
0.2	0.058	0.98	1	-3.905	4.91	3	0.631	0.79	1	-2.217	1.74
0.4	-1.209	1.40	2	-3.211	2.61	5	-0.968	1.32	2	-2.399	1.80
0.8	-4.072	2.36	4	-1.996	1.50	8	-3.399	2.13	4	-2.774	1.92
0.9	-4.860	2.62	5	-1.434	1.29	9	-4.217	2.41	5	-2.968	1.99

Conclusion

In Figure 3, we show the flow pattern calculated at $\varepsilon=0.6$, $T=7$, $S=3$, $H=7$, $H_0=3$ and $\times C=100$. The results of calculations of the effect of the determining physical parameters ε , S , H and H_0 on the value of d and the parameter $h(d)$ are listed in Table 2 (the negative values of d mean that the free surface rises behind the tongue above the abscissas abscissa axis). The analysis of calculations and data in (Table 2) enable us to make the following conclusions. An increase in the intensity of infiltration and pressure in the pool and in the underlying horizon, as well as a decrease in the layer thickness and the tongue length, result in decreasing value of d . We recall that, previously in Scheme 1, a decrease in the evaporation intensity, on the contrary, resulted in similar behavior of the value of d . From Table 2, it can be seen that it is exactly the infiltration on the free surface that induces the greatest effect on the depth d , it being quite substantial that the value of d varies almost 84 times with increasing the parameter ε 4.5 times. Contrary to Scheme 1, where only positive values of d were observed, here it proved that $d < 0$ for the overwhelming majority of the calculation variants, i.e., the depression curve rises above the abscissa axis and, hence, $h(d) > 1$. In this case, the values of the parameter h can be quite significant: From Table 2, it follows that $h(d)=4.91$ for $S=1$. It can be seen that, as in scheme 1, the lowest value of h is achieved now upon variation of the infiltration intensity ε on the free surface: $\text{min } h(d)=0.98$ at $\varepsilon=0.2$.

References

- N. E. Joukowski. "Infiltration of Water through Dams." Collected Works (Gostekhizdat, Moscow, 1950), Vol. 7, [in Russian].
- Polubarinova-Kochina, P. Ya. "Theory of the motion of ground water." Nauka, Moscow (1977).
- Entov, V., S. Numerov, P. Polubarinova-Kochina and I. Charnyi. "Development of Investigations on the theory of filtration in the USSR (1917–1967)." (1969).
- Kochina, P. Ya, E. N. Bereslavskii and N. N. Kochina. "Analytical theory of linear differential equations of the fuks class and certain problems of underground hydromechanics." Preprint 567 (1996).
- Bereslavskii, E. N. and P. Ya Kochina. "Some equations of the Fuchs class in hydro-and aeromechanics." Fluid Dyn 27 (1992): 603-607.
- Bereslavskii, KN and P. Ya Kochina. "Differential equations of the Fuchs class encountered in some problems of mechanics of liquids and gases." Fluid Dyn 32 (1997): 619-625.
- Golubev, V.V. "Lectures on the analytic theory of differential equations." Gostekhizdat, Moscow (1950).
- Bereslavskii, E. N. "Spin fresh water salt water during filtration of the cold snap sprinkler." Appl Math Mech 53 (1989): 350-355.
- Bereslavskii, E. N. "The intake of purified fresh water with filtration from a reservoir." Appl Math Mech 54 (1990): 714-718.
- Bereslavskii, E. N. "A hydrodynamic model for the forcing back of stagnant salt water by fresh filtration water flowing around a Joukowski tongue." Dokl Phys 43 (1998): 775-778.
- V. V. Vedernikov. K teorii drenazha//Report of the Academy of Sciences of the USSR, 1939, v. XXIII, i. 4: 335–337
- V. V. Vedernikov. K teorii drenazha//Report of the Academy of Sciences of the USSR, 1948, v. LIX, i. 6: 1069-1072.
- Vedernikov, V. V. "Filtracija pri nalichii drenirujushogo ili vodonosnogo sloja." Report of the Academy of Sciences of the USSR 69 (1949): 619-622.
- Nelson-Skornyakov, F. B. "Pritekanie gruntovyh vod so svobodnoj poverhnost'ju k sisteme dren pri glubokom zaleganii vdoupora." Izv AS USSR, OTN (1941): 126-128.
- Nelson-Skornyakov, F. B. "Dvizhenie gruntovoj vody so svobodnoj poverhnust'ju cherez plotinu s dvumja diafragmami." Izv AS USSR (1941): 39-44.

How to cite this article: Naumovich, Bereslavsky Edward. "About Filtration in Some Tasks Underground Hydrodynamics." Hydrol Current Res 14 (2023): 478.