

Groundwater Potential Zone Mapping of Lower Omo-Gibe Watershed, Omo-Gibe Basin, Ethiopia

Eyasu Tafese Mekuria*

Department of Hydraulic and Water Resources Engineering, College of Engineering and Technology, Wolkite University, Wolkite, Ethiopia

Abstract

The demand for an investigation of groundwater is occasionally increased by the ever-increasing population and abrupt climatic changes. Groundwater is currently the most important source of fresh water, and many researchers are attempting to cover all aspects of this resource in order to achieve sustainable development. This scientific and academic research and studies are attempting to present a multi-range of techniques and methods focusing on groundwater pollution, potentials, assessment, and prediction. To delineate Groundwater Potential (GWP) zones in the lower Omo-Gibe Watershed, Omo-Gibe Basin, Ethiopia, an integrated strategy of Remote Sensing (RS), Geographic Information Systems (GIS), and Multi-Criteria Decision Analysis (MCDA) using Analytical Hierarchical Process (AHP) was used. For this purpose, seven GWP influencing thematic layers comprising lineament density, slope, soil, drainage density, landuse landcover, geology, elevation and rainfall map were used. Scale values for the classes and thematic layers within them were determined using Satty's AHP and based on expert and literary judgment. The thematic layers have been integrated via their rates using weighted overlay spatial function tool of ArcGIS to provide GWP map. The distribution and extents of different potential groundwater zone are 158.05 km² (21.59%), 35.92 km² (4.91%), 214.77 km² (29.34%), 220.59 km² (30.13%), and 102.72 km² (14.03%) for very good, good, moderate and fair zone respectively. The study's conclusions can be used to develop a groundwater action plan that will effectively protect the study area's considerable groundwater resources. With regard to the long-term availability of groundwater, this research will be very beneficial to water management.

Keywords: Lower Omo-Gibe watershed • Omo-Gibe basin • Analytical Hierarchical Process (AHP) • Geographic Information Systems (GIS) Groundwater Potential (GWP) • Multi-Criteria Decision Analysis (MCDA)

Introduction

Groundwater is a valuable natural resource, and finding the best locations for groundwater recharge, monitoring wells, water supplies, and groundwater quality depends on exploration and wise management of this resource [1]. Given the constantly rising demand for freshwater, groundwater is a crucial freshwater resource for maintaining daily life in urban and suburban areas [2]. The importance of studying groundwater potential zones is based on the quantity, quality, and contamination of groundwater. The main causes of the consistent rise in freshwater demand are population expansion, the need for irrigation in agriculture, and climate change [3]. Groundwater as a substitute supply of fresh water has received serious attention due to the dangers of surface water pollution, rapid climate change, and the likelihood of droughts [4]. In order to keep the ecological balance of the earth system, groundwater is an essential part of the hydrological cycle. By providing freshwater for

drinking, agriculture, and industry, it maintains life [5]. Because it is less polluted than surface water sources, which are easily contaminated by human activities like industrial and agricultural operations, groundwater becomes a significant alternative supply of freshwater in areas with a semi-arid temperature and environment [6].

Groundwater potential maps are available in many nations of the world, assisting planners and decision-makers in the development, distribution, and management of groundwater resources [7]. Groundwater accounts for one-third of all freshwater abstractions globally [8]. In many regions of the world where water supplies are limited, groundwater is a crucial natural resource for any economic and social growth [9]. Groundwater supplies are a necessity for all economic activity, both internally and outside. However, a study that combines remote sensing and GIS data can offer a good platform for the converging analysis of massive amounts of data using very

*Address for Correspondence: Eyasu Tafese Mekuria, Department of Hydraulic and Water Resources Engineering, College of Engineering and Technology, Wolkite University, Wolkite, Ethiopia, Tel: 251917919929; E-mail: eyasu.tafese@wku.edu.et

Copyright: © 2023 Mekuria ET. This is an open-access article distributed under the terms of the creative commons attribution license which permits unrestricted use, distribution and reproduction in any medium, provided the original author and source are credited.

Received: 15 June, 2023, Manuscript No. JCDE-23-102676; Editor assigned: 19 June, 2023, PreQC No. JCDE-23-102676 (PQ); Reviewed: 04 July, 2023, QC No. JCDE-23-102676; Revised: 16 August, 2023, Manuscript No. JCDE-23-102676 (R); Published: 24 August, 2023, DOI: DOI: 10.37421/2165-784X.2023.13.528

advanced cognitive process techniques for groundwater exploration.

Nations like Ethiopia are seeing a rise in groundwater demand as a result of the nation's fast urbanization, population growth, and economic development. In the area under examination, groundwater is the most often used resource for agriculture, animal husbandry, and the provision of drinking water.

The lower omogibe watershed groundwater potential zone mapping will have a significant impact on the sub-basin. Since the lower Omo-Gibe watershed is the main source of the Omo River, mapping the underground water would improve the nation's groundwater resources' sustainable management. Because of this, the current study is interested in delineating the groundwater potential zones within the study area using remote sensing and GIS technology.

Seven determining elements were taken into consideration for the study: Slope, land use land cover, lineament density, geology, elevation, soil texture, and drainage density.

In order to ensure sustainable management and growth of the resource, groundwater exploration has recently seen a rise in the usage of remote sensing and Geographic Information Systems (GIS). With the development of technology, more scientists are employing Remote Sensing (RS) and Geographic Information Systems (GIS) to evaluate a basin's groundwater supplies [10]. Geophysical technology-based groundwater exploration methods are expensive and time-consuming [11]. Due of these problems, humans have been forced to use a variety of technologies that can help them research vast areas in a brief amount of time while using few resources. These techniques, which include remote sensing and GIS, have been applied to find groundwater potential zones. Exploring the groundwater potential zone in varied geological settings is made simple and rapid with this method. Several scholars have employed the RS and GIS procedures to designate groundwater potential zones all over the world [12]. Utilizing RS and GIS, groundwater resources can be found and explored. Geology, geomorphology, slope, soil type, rainfall, land use/land cover, lineament structures, and drainage criteria are all important factors [13]. Geospatial technologies offer quick and affordable ways to evaluate spatial data across a range of geoscience disciplines [14].

For long-term resource management, it is essential to be able to locate the groundwater potential zone. It aids policymakers, decision-makers, and planners in making sure the groundwater resource is safeguarded from influences on both quantity and quality. The Analytical Hierarchy Process (AHP) is one of the approaches to multi-criteria decision-making that is most frequently used [15]. AHP can be used to demarcate groundwater potential zones since it is an easy, quick, dependable, and efficient procedure [16]. When it comes to creating sustainable groundwater policies in this district, planners and policymakers will find this research to be a useful resource.

Materials and Methods

Study area

The Lower Omo-Gibe River Watershed is about 2345.5 km² in area and is situated in the Omo-Gibe Basin, South Ethiopia. Lower omogibe watershed (Figure 1) mainly covers South nation and nationality region and South-west Ethiopia region. Mirab Omo, South Omo and Basketo Zones are included in this watershed. Woredas such as Maji, Salamago, South Ari, Jinka town, Boko Dawula, Hamera, Nyngatom, North Ari and Mele koza. It has a Southern boundary that is formed by the contained river basin that empties into Kenya's Lake Turkana. The lower Omo-Gibe watershed plain is distinguished by the fact that, although being rather flat, it has various beach ridges and depressions. It was formed very recently by the subsequent movements of Lake Turkana. The Omo delta, in the South of the Basin and at the Northern end of Lake Turkana has aggraded to such an extent in recent years only some 25 km² of the lake is in Ethiopia.

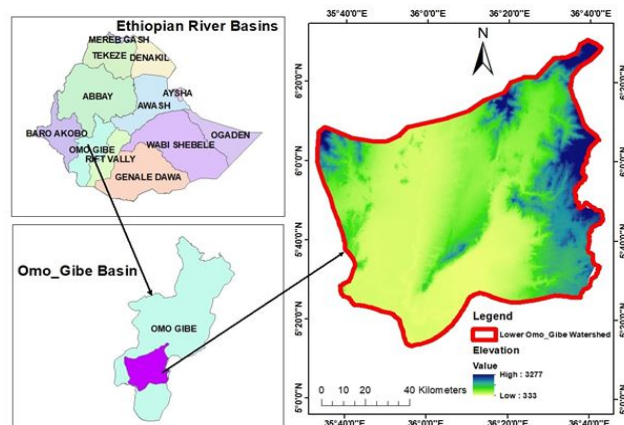


Figure 1. Location map of the study area.

Methods and data analysis

The groundwater potential in this study was assessed using seven criteria including soil, lineament density, landuse landcover, slope, drainage density, rainfall, geology, For each criteria, thematic maps were created and utilized to assess the groundwater potential of the study area. In this study, the relationship between the variables that were utilized to forecast groundwater potential during weight calculation and the actual groundwater potential was analyzed.

Slope: In mapping groundwater potential, slope is a key factor. It determines surface runoff and vertical percolation of water; hence, it affects groundwater recharge processes. Slope was inversely related to infiltration. Shuttle Radar Topography Missions (SRTM) 30 m resolution Digital Elevation Model (DEM) was used to generate slope map. The slope map was classified into five classes (Figure 2) based on FAO classification standard [17].

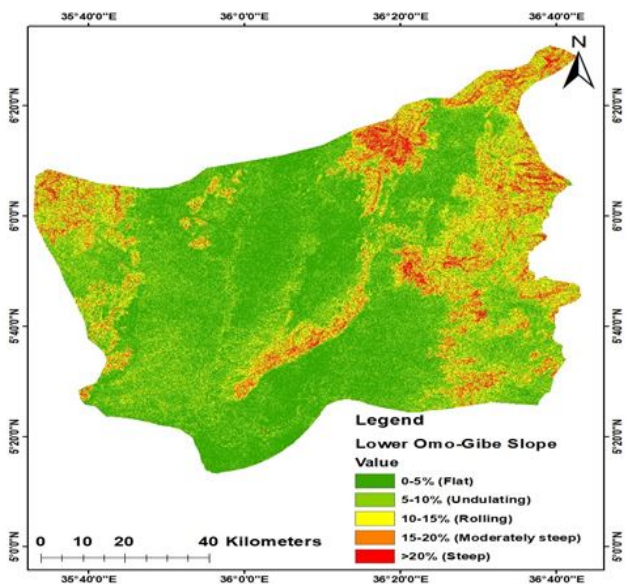


Figure 2. Slope map.

Drainage density: Drainage density has an impact on both the availability and pollution of groundwater. Lithology has an impact on the drainage system, which is a crucial gauge of infiltration rate. Drainage density has an inverse relationship with permeability. As a result, it is a crucial component in determining the groundwater potential zone obtained from DEM data. Finding the length of the stream and dividing on to the total area of the basin as shown in the equation of Drainage Density $DD=L$ (length/A (area) and using Archydro program. The drainage-density map (Figure 3) was created by dividing themed river maps produced from a basin-wide Flow accumulation (Fac) and stream definition operation.

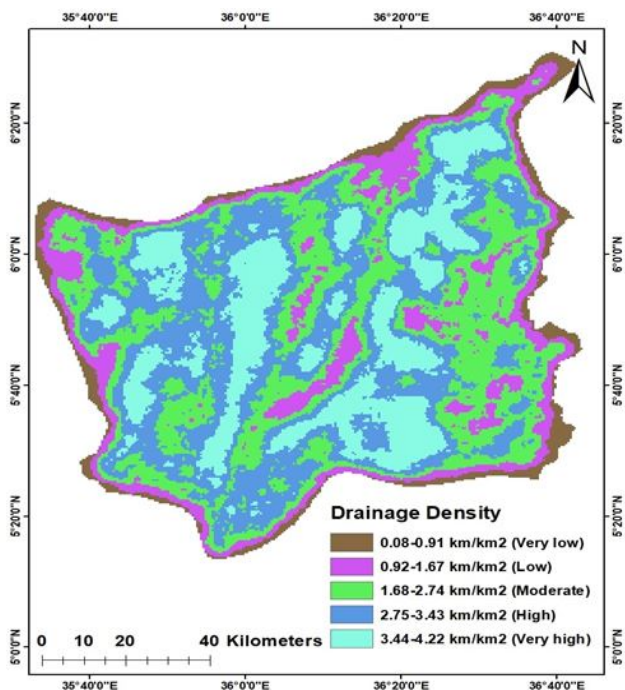


Figure 3. Drainage density map.

Geology: The geologic environment has a significant influence on the existence and distribution of groundwater in any terrain. One of the most crucial factors in evaluating groundwater potential zones is geomorphology, which relates to an area's landform and terrain. It gives information on how different landform traits are distributed as well as information on numerous processes, including temperature changes, geochemical reactions, water flow, freezing and thawing, and more.

Geologic and geomorphological maps created by translating length and measurement into kilometers (km), digitizing with the Arc GIS spatial analyzer application, and then saving the data as shape files. The geological structures were modified to raster file format with the corresponding presentation, and the region's geological state was assessed. The following formula was used to compute the lineament (fault) density (LL). The geology of lower Omo-Gibe watershed (Figure 4) characterized by tertiary extrusive and intrusive rock, tertiary, quaternary and permian-carboniferous.

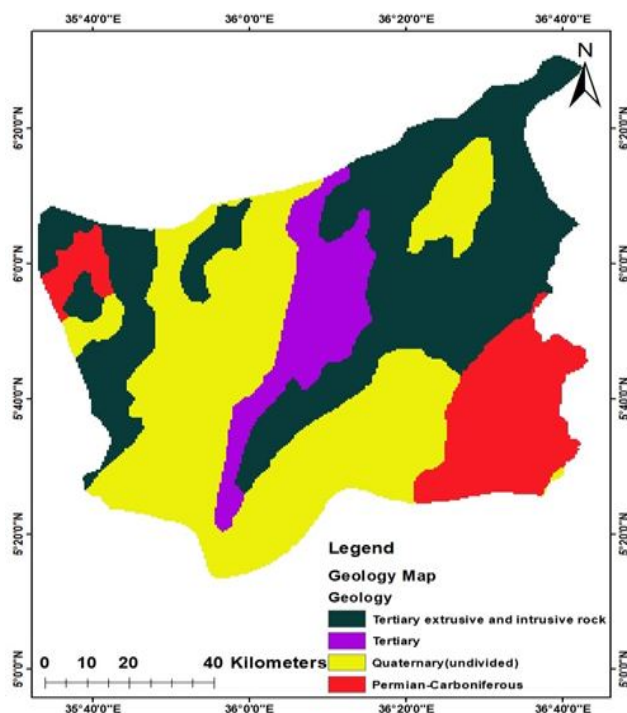


Figure 4. Geology map.

Elevation: Elevation of the catchment ranges from 333 to 3277 m above sea level (Figure 5). High elevation was found in west and north edge of the study area and decrease toward east and south of the study area except topographically irregular and hilly areas. A higher weight is given for lower elevated zones and lower weight was assigned for highly elevated areas.

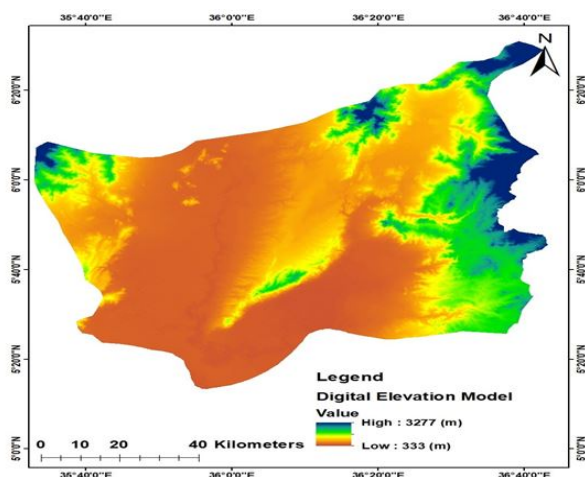


Figure 5. Elevation map.

Landuse landcover: One of the key determining criteria to pinpoint areas with potential for groundwater recharge is the landuse and landcover map [18]. Landuse and landcover have an impact on hydrological processes such as evapotranspiration, surface runoff, and infiltration. Areas with vegetation cover have high groundwater potential than built-up areas that inhibits the infiltration of water into the subsurface. From land use classes, built-up area has the lowest weight compared to other classes and crop land has the highest weight [19]. Landuse landcover offers essential details on infiltration, moisture, groundwater, and surface water in addition to suggestions on groundwater requirements. The primary coverings of the land surface by human activity or vegetation are referred to as landuse and landcover, respectively (natural or planted).

The land-use type in the study area in accordance with the order of infiltration includes barren land, built up land, crop land, grass land, lichen mosses, open water, shrubs cover area, tress cover area and vegetation aquatic (Figure 6). The landuse landcover layer was obtained from the Ethiopia Sentinel 2 LULC 2022. The boundaries in the layer were then visually evaluated using Landsat 8 satellite images. Next, the land-use classes changed to the USGS standard classifications. Finally, the layer was entered into the GIS model after the necessary edits.

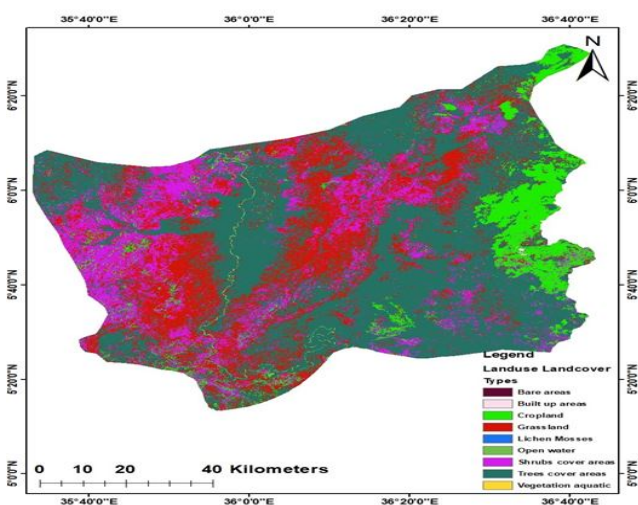


Figure 6. Landuse landcover.

Lineament density: Lineaments are tectonic-derived linear, rectilinear, and curvilinear features that are visible in satellite photography. These lineaments typically display linearity and curvilinearities in vegetation, drainage, drainage patterns, soil tonality, relief, and tonality in soil in satellite data. In particular, in the lineaments that are not filled by soil, the lineaments may operate as a channel for water to seep into the earth and migrate through the aquifer system due to linear features including fault, fractures, and geological connections between various lithologies. Since it is assumed that the rate of water infiltration increases with increasing lineament density, the lineament density (Figure 7) of a region might indirectly indicate the groundwater potential. These lineaments are mapped with the help of satellite data and can be correlated with faults, fractures, joints, bedding planes and geological contacts which are useful for the groundwater potential study.

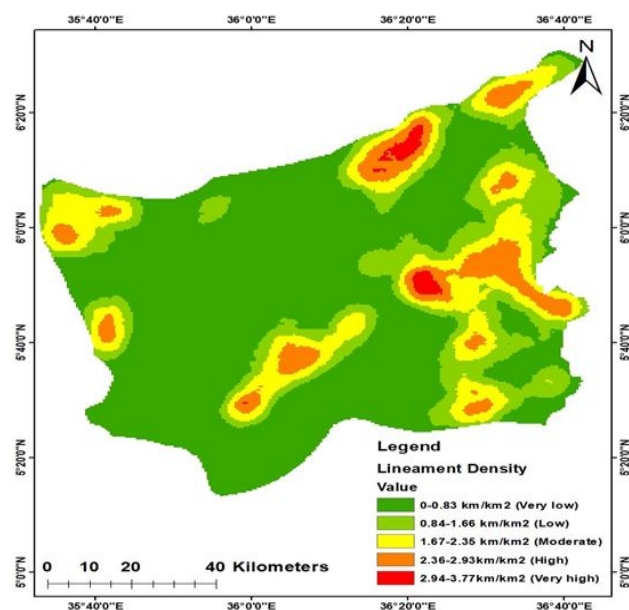


Figure 7. Lineament density map.

Soil: The type of soil texture present in an area has a great impact on the availability of groundwater. Highly porous soils allow easy percolation and infiltration of surface water into the subsurface, and this is ideal for a favourable groundwater potential. Soil properties influence the relationship between runoff and infiltration rates, which in turn control the degree of permeability [20]. Soil texture raster data of the Lower Omo-Gibe Watershed was obtained by HWSD (Harmonized World Soil Database) version 1.2 at 900 m resolution. Lower Omo-Gibe Watershed consists of five major soil textural groups (Figure 8), such as Eutric Nitosols, Eutric Cambisols, Calcaric Fluvisols, Chromic Vertisols and Haplic Yermosols. Due to their difference in infiltration and porosity, weight of soil texture is assigned on the basis of their infiltration rate.

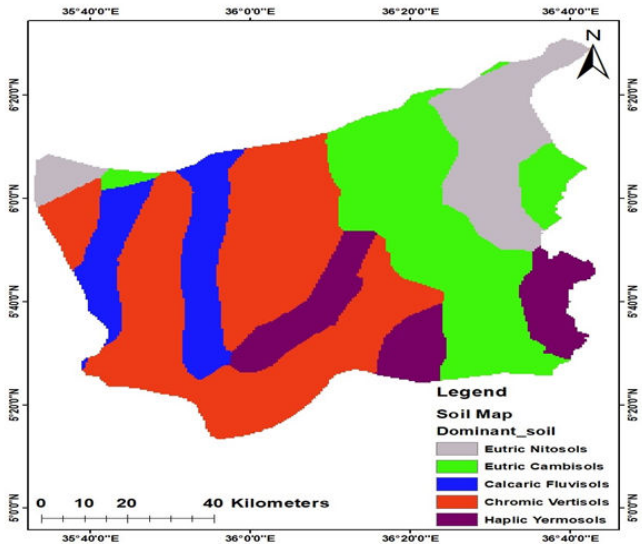


Figure 8. Soil map.

Rainfall: The slope gradient and rainfall distribution have a direct impact on the infiltration rate and the potential for groundwater potential zones. As indicated in Figure 9, the annual rainfall was categorized into five classes: Very high (1410–1520 mm), high (1300–1400 mm), moderate (1180–1290 mm), low (1070–1170 mm), very low (946–1060 mm) and extremely very low (831–945 mm). Rainfall generally decreases from East to West and similar to elevation, with annual rainfall varying between 831 mm and 1520 mm.

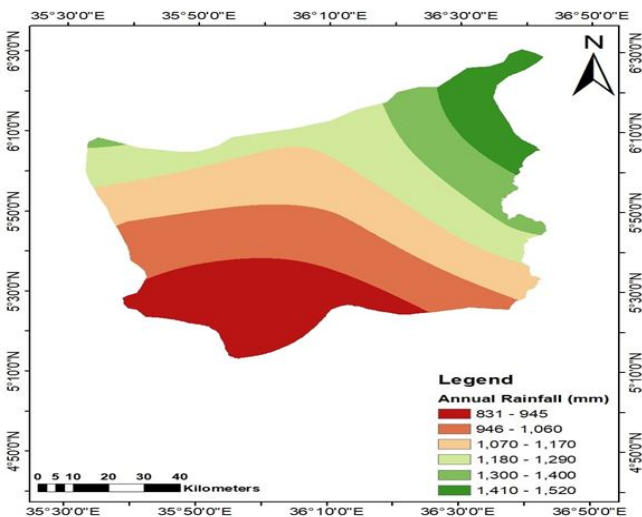


Figure 9. Annual rainfall map.

GIS based AHP method

GIS (Geographic Information System): A software and hardware combination is a created instrument that has been extensively employed in groundwater potential zones and assessment. A method for limiting the number of target regions for hydrogeophysical study is provided by the combined RS and GIS analysis. Following site appraisal and selection for sustainable groundwater management, site-specific ground geophysical methods like Vertical

Electrical Sounding (VES) and very Low Frequency Electromagnetic (VLF-EM) profiling may be used. In the GIS and RS spatial analysis and modeling, thematic layers for soil, lineament density, drainage density, geomorphology, slope, and LULC are integrated. In terms of groundwater prospect, weights ranging from 1 to 4 were allocated to the classes in order of increasing.

AHP (Analytical Hierarchy Process): Developing an Analytical Hierarchy Process (AHP) model, making a decision hierarchy is the first step in an AHP analysis. AHP divides the issue into a hierarchy. As adopted by Mu and Pereyra-Rojas first level of the hierarchy is the goal of groundwater potential zone identification. The second level in the hierarchy indicates the parameters that used to decide the potential zone and the third level is about an alternative to select groundwater potential zone as very good, good, moderate and fair. The benefit of AHP is that it simplifies issue solving by better understanding how to break down challenges. To make sure that all requirements and potential alternatives were followed, it is also feasible to request the participation of specialists.

It's one of the techniques employed the most in MCDA approaches, as was indicated in the introduction, this concept has been developed by Saaty 1984. The AHP evaluates a collection of evaluation criteria as well as a set of alternate options before selecting the best one with the most weight. It is a strategy for assessing the relative weights of the criteria, different optimization strategies for each parameter, and generating an average rating of the variations that were generated using the predetermined criteria (selection criteria identification) at a certain stage. The AHP is frequently used to establish priorities utilizing expert recommendations and evaluations, reduce issue confusion and complexity, and facilitate decision-making. There should be at least two criteria and two substitutes in every study that has been examined by AHP in order to determine each factor's weight. Since these criteria were given varying degrees of importance, education and expertise are particularly important for thorough evaluation and analysis. It's possible to employ both qualitative and quantitative criteria. After using AHP within the MCDA, a decision matrix was produced in each study that was reviewed. Field experiences and literature reviews were used to weigh several parameters on a flexible scale from 1 to 5. Then using a few formulae to get the systems normalized weight and Consistency Ratio (CR) (Figure 10).

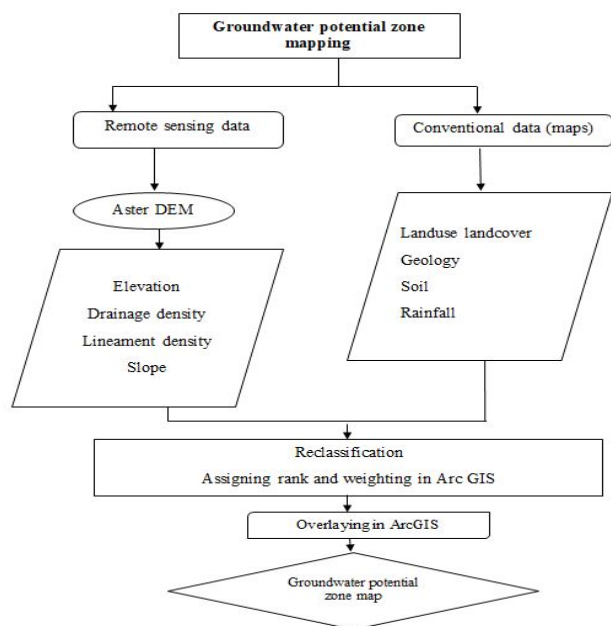


Figure 10. Methodology flow chart for the present study.

Results and Discussion

Landuse landcover

Land use map of the study area consists of several classes, viz., bare area 112 km², built up area 143 km², cropland 435 km², grassland 268.5 km², lichen mosses 112 km², open water 97 km², shrubs cover areas 289 km², tree cover areas 667 km² and vegetation aquatic 222 km² as shown in Figure 6 and Table 1. Land use is one of the important criteria for identifying groundwater potential zones. Suitable weights were given to each class and their areal extents were calculated using “zonal statistics” in GIS (Table 1).

Land use class	Categories	Area (km ²)	Area (%)
Bare area	Poor	112	4.78
Built up area	Very poor	143	6.1
Cropland	Moderate	435	18.55
Grassland	Good	268.5	11.45
Lichen mosses	Good	112	4.78
Open water	Very good	97	4.14
Shrubs cover areas	Poor	289	12.32
Tree cover areas	Very good	667	28.44
Vegetation aquatic	Very good	222	9.46

Table 1. Area covered under different range of parameter of landuse landcover.

Geology

Geology is also one of the input parameter factors in delineating the groundwater potential zones. Four different lithologies have been observed in the study area. Their areal extent has been determined using “zonal statistics” in geographic information system domain

(Table 2). Geology of Lower Omo-Gibe watershed is dominated by tertiary extrusive and intrusive rock 758 (32.32%), tertiary (397 Km², 16.93%), quaternary (845 km², 36.03%) and Permian-Carboniferous (345.5 km², 14.73%).

Geology class	Categories	Area (km ²)	Area (%)
Tertiary extrusive and intrusive rock	Very good	758	32.32
Tertiary	Good	397	16.93
Quaternary	Moderate	845	36.03
Permian-Carboniferous	Poor	345.5	14.73

Table 2. Area covered under different range of parameter of geology.

Slope

The slope of the study area has been estimated from Digital Elevation Model (DEM) data as shown in Figure 2 and Table 3. Flat or gentle slope is suitable for increasing the infiltration amount from rainfall. Otherwise, in steep slope area where the infiltration capacity is very minimum whereas runoff is maximum. From the analysis, slope

ranges from 0-5 percent rise covers high area coverage which is 31.29% (734 Km²), 5-10 slope categories covers 17.67% (414.5 km²), 10-15 slope categories covers 13.69% (321 km²), 15-20 slope categories covers 9.46% (222 km²) and >20 slope categories covers 27.88% (654 km²).

Slope categories	Categories	Area (Km ²)	Area (%)
0-5	Very good	734	31.29
5-10	Good	414.5	17.67
10-15	Moderate	321	13.69
15-20	Poor	222	9.46
>20	Very poor	654	27.88

Table 3. Area covered under different range of parameter of slope.

Soil type

Soil type is also one of the most determinant factors in estimating the groundwater. Ten different soil types have been observed in the study area. Their areal extent has been determined using “zonal statistics” in geographic information system domain (Table 4). Soil

type of Bahir dar zuria is dominated by vertisoil with an aerial extent of 1045.19 Km² (67.78%), followed by luvisoil (284.31 Km², 18.08%), and other units together cover in the study area as indicated in Figure 8 and Table 4. Based on the hydraulic properties of the soil, the soil classes were accordingly ranked using AHP.

Soil class	Categories	Area (km ²)	Area (%)
Eutric nitosols	Moderate	450	19.19
Eutric cambisols	Good	498	21.23
Calcaric fluvisols	Very good	356	15.18
Chromic vertisols	Very poor	782	33.34
Hapric hermossols	Poor	259.5	11.06

Table 4. Area covered under different range of parameter of soil type.

Lineament density

Lineaments are the natural linear feature like faults, joints and fractures, which can visualize and interpreted directly from remotely sensed data. As shown in the Table 5, lineament density class ranked as very low, low, medium, high and very high with the areal extent of 0-0.83 Km/Km², 0.84-1.66 Km/Km², 1.67-2.35 Km/Km², 2.36-2.93 Km/Km² and 2.94-3.77 Km/Km² respectively. The total area

falling in different range of lineament density is given in Figure 7 and Table 5 which show that most part of the study area have very low lineament density. So very low lineament density indicates very low infiltration rate, whereas the high lineament density areas indicate high infiltration (Table 5) thus a potential zone for groundwater development.

Lineament density class	Categories	Area (Km ²)	Area (%)
0-0.83	Very low	1411	60.16
0.84-1.66	Low	322	13.73
1.67-2.35	Moderate	198	8.44
2.36-2.93	High	201.5	8.59
2.94-3.77	Very high	213	9.08

Table 5. Area covered under different range of parameter of lineament.

Drainage density

Drainage density is a significant parameter for evaluating the groundwater potential zones. The areas having high drainage density have less potential for groundwater recharge, and the areas with low drainage density have a high potential for groundwater recharge. Hence, the areas having low drainage density are favorable for high groundwater potentiality. So, higher weights were assigned to the

areas having low drainage density. The drainage density was classified into five categories viz. very low (0.08-0.91 km/km²), low (0.92-1.67 km/km²), moderate (1.68-2.74 km/km²), high (2.75-3.43 km/km²) and very high (3.44-4.22 km/km²). The highest area was under low density with 225.5 km², followed by very low with 388 km², moderate 510 km², high 589 km², and very high 633 km² as shown in Figure 3 and Table 6.

Drainage density class	Categories	Area (Km ²)	Area (%)
0.08-0.91	Very low	225.5	9.61
0.92-1.67	Low	388	16.54
1.68-2.74	Moderate	510	21.74
2.75-3.43	High	589	25.11
3.44-4.22	Very high	633	26.99

Table 6. Area covered under different range of parameter of slope.

Rainfall

Rainfall is one of the most important sources of groundwater recharge through percolation in the groundwater system. The average annual rainfall in the study area is grouped into six classes namely extremely very low (831-945 mm), very low (946-1060 mm), low (1070-1170 mm), moderate (1180-1290 mm), high (1300-1400

mm) and very high (1410-1520 mm), covering the area of about 410 km² (17.48%), 370 km² (15.77%), 366 km² (15.60%), 433 km² (18.46%), 376.5 km² (16.05%) and 390 km² (16.63%), respectively as shown in Figure 9 and Table 7. Rainfall distribution along with the slope gradient directly affects the infiltration rate of runoff water hence, increases the possibility of groundwater potential zones.

Rainfall class	Categories	Area (Km ²)	Area (%)
831-945	Extremely very low	410	17.48
946-1060	Very low	370	15.77
1070-1170	Low	366	15.6
1180-1290	Moderate	433	18.46
1300-1400	High	376.5	16.05
1410-1520	Very high	390	16.63

Table 7. Area covered under different range of parameter of rainfall.

Derived priorities (weights) for the parameters

The AHP method was applied in the current work to determine the weight for each data layer. One of the most widely used techniques for determining the weights of criterion in the Multi-Criteria Decision Making is AHP (MCDM). To identify the purpose, criteria, and relationship between them, the hierarchical structure of the subject being studied is created as the first stage in the AHP approach. Initially, the AHP approach involved conducting a pairwise comparison of the alternatives using specially created questions that followed the format of the standard AHP questionnaires. In this study, opinions from a range of experts were gathered regarding the potential for groundwater, including hydrologists, hydro geologists, environmentalists, and GIS experts. The overall method is as described in the following figure (Figure 9).

The result of AHP shows that geology has the highest weight (38.39%) followed by slope, which accounts for 23.27%, drainage density 14.54%, landuse landcover 11.40%, lineament density 7.04% and soil 5.35% of the weight given to each parameter (Tables 1 and 2). When the judgement matrix is consistent and the computed weight has been normalized by multiplying the derived weight of all parameters by 100%, it is then possible to rank the features of each parameter for the purpose of a weighted overlay. Features of each thematic layer were ranked on the basis of influence of groundwater potential within each parameter (Table 8).

Factors	Geology	Lineament density	Slope	Rainfall	Soil	LULC	Drainage density	Weight
Geology	7	6	5	4	3	2	1	38%
Lineament density	7/2	6/2	5/2	4/2	3/2	2/2	1/2	19%
Slope	7/3	6/3	5/3	4/3	3/3	2/3	1/3	12%
Rainfall	7/4	6/4	5/4	4/4	3/4	2/4	1/4	10%
Soil	7/5	6/5	5/5	4/5	3/5	2/5	1/5	8%
LULC	7/6	6/6	5/6	4/6	3/6	2/6	1/6	6.60%
Drainage density	7/7	6/7	5/7	4/7	3/7	2/7	1/7	6.40%

Table 8. Comparison matrix and significance weightage value of the influential factors.

Groundwater potential zone of the watershed

To choose the best location for future groundwater development and management, it is crucial to integrate several groundwater regulating variables for discovering possible potential groundwater resources. Using the WLC of the GIS spatial analysis tool, all created thematic maps were integrated based on their weights and rates. The calculations of all the layers went into creating the GWP map. A prospective groundwater zone map was created by weighing the various theme layers and their specific features (Figure 11). The potential groundwater zone of the study area revealed five distinct zones, namely very good, good, moderate and fair. The distribution and extents of different potential groundwater zone are 158.05 km² (21.59%), 35.92 km² (4.91%), 214.77 km² (29.34%), 220.59 km² (30.13%), and 102.72 km² (14.03%) for very good, good, moderate and fair zone respectively (Table 3). Study area have very high to high potential zone in southern, south west and central portion, while the west and eastern portion exhibits medium to low groundwater potentials. The distribution is more or less a reflection of drainage density, lineament, slope, and soil patterns in addition to geomorphic and geological elements, according to analysis of the groundwater potential map (Table 9).

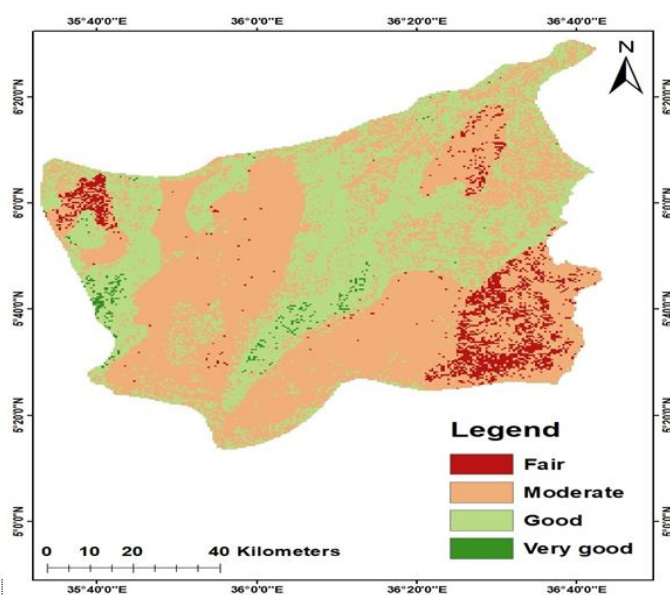


Figure 11. Groundwater potential map.

Groundwater potential zone class	Area (sq. km)	Area in percent
Fair	432.9	18.45
Moderate	634.8	27.06
Good	954.3	40.68
Very good	323.5	13.79
Total	2345.5	100

Table 9. Groundwater potential zone.

The region appears to have a great potential for irrigation because there are large expanses of irrigable land with fertile soil available. The watershed lower areas get volcanic sediments that are moved from the watershed upper portions due to its geographic location. The area is seen as one where food security is a worry, despite having a lot of potential for irrigation agriculture due to its good soil, irrigable acreage, and high capacity for groundwater. I consequently suggest that concerted activities by the district and

regional governments are required to improve the living conditions of persons who reside in the catchment. I have found in my study that the watershed may be abundant in water resources, particularly groundwater. Groundwater was found to have a high potential in nearly half of the basin. Despite the aforementioned limitation, I am confident that the results can be used to identify solutions for utilizing the local water resources and resolving the

issue that the residents have been experiencing. I advise that a thorough investigation be done to determine the quantity and quality of water that is available in order to determine whether it can be used for the intended purpose. Due to the availability of substantial tracts of irrigable land with fertile soil, the area appears to have a high potential for irrigation. Due to its geographical location, the watershed lower portions receive volcanic sediments that are transferred from the watershed top portions. Despite having a lot of potential for irrigation agriculture due to its good soil, irrigable land, and high capacity for groundwater, the region is considered one of the locations where food security is a concern. In order to better the living conditions of those living in the watershed, I therefore propose that coordinated actions by the district and regional governments are needed.

Conclusion

In this study, groundwater potential zone evaluation using remote sensing, GIS, and MCDM methodologies has been successfully used and proven. The generation of thematic layers, the application of AHP to get the weights, and overlay analysis to determine the groundwater potential zone is the three steps of the process. Thematic layers were created by digitizing existing maps using a GIS and remotely sensed satellite image data. Utilizing the AHP, utility weights for the substitutes were provided. The identification of the groundwater potential zone uses an overlay analysis of multiple thematic maps and weighting. Based on remote sensing, GIS, and MCDA methodologies, four categories of groundwater potential zones have been identified in this study region. This particular study deals with the assessment of Groundwater Potential Zones (GWPZs) using geographical information systems and remote sensing techniques in the Lower Omo-Gibe watershed, Omo-Gibe Basin, Ethiopia. The thematic layers influencing GWPZs such as geology, landuse/landcover, slope, lineament density, drainage density, soil properties (soil texture, soil type), and elevation maps were getting prepared with the available data, i.e., conventional data, satellite image, and assigned individual weights along with their subclass divisions depending on literature and expertise decision. The distribution and extents of different potential groundwater zone are 158.05 km² (21.59%), 35.92 km² (4.91%), 214.77 km² (29.34%), 220.59 km² (30.13%), and 102.72 km² (14.03%) for very good, good, moderate and fair zone respectively.

Data Availability

Data used in this research are available upon request.

Conflicts of Interest

The author declares that they have no conflicts of interest or personal relationships that could have influenced the work reported in this paper.

Acknowledgments

The authors acknowledge the Ethiopian ministry of water, irrigation and energy, and the national metrological agency for providing the necessary data which is helpful to accomplish this research work.

References

1. Adewumi, Adeniyi JohnPaul, and Yekeen Biodun Anifowose. "Hydrogeologic characterization of Owo and its environs using remote sensing and GIS." *Appl Water Sci* 7 (2017): 2987-3000.
2. Shishaye, Haile Arefayne, and Semir Abdi. "Groundwater exploration for water well site locations using geophysical survey methods." *Hydrol Curr Res* 7 (2016).
3. Arulbalaji, Palanisamy, Damodharan Padmalal, and K Sreelash. "GIS and AHP techniques based delineation of groundwater potential zones: a case study from southern Western Ghats, India." *Sci Rep* 9 (2019): 2082.
4. Barua, Swarnali, Bhabani Prasad Mukhopadhyay, and Amit Bera. "Integrated assessment of groundwater potential zone under agricultural dominated areas in the western part of Dakshin Dinajpur district, West Bengal, India." *Arab J Geosci* 14 (2021): 1-17.
5. Biswas, Ashis, Bibhash Nath, Prosun Bhattacharya, and Dipti Halder, et al. "Hydrogeochemical contrast between brown and grey sand aquifers in shallow depth of Bengal Basin: consequences for sustainable drinking water supply." *Sci Total Environ* 431 (2012): 402-412.
6. Biswas, Swagata, Bhabani Prasad Mukhopadhyay, and Amit Bera. "Delineating groundwater potential zones of agriculture dominated landscapes using GIS based AHP techniques: a case study from Uttar Dinajpur district, West Bengal." *Environ Earth Sci* 79 (2020): 1-25.
7. Abirami, C. "Annadurai," "Identification of Groundwater Potential Zones on GIS based Multi-Criteria Technique-A Case Study Erode District,." *Int J Eng Res Technol* 4 (2016): 1-6.
8. Uc Castillo, Jose Luis, Diego Armando Martinez Cruz, and Jose Alfredo Ramos Leal, et al. "Delineation of groundwater potential zones (GWPZs) in a semi-arid basin through remote sensing, GIS, and AHP approaches." *Water* 14 (2022): 2138.
9. Celik, Recep. "Evaluation of groundwater potential by GIS-based multicriteria decision making as a spatial prediction tool: Case study in the Tigris River Batman-Hasankeyf Sub-Basin, Turkey." *Water* 11 (2019): 2630.
10. Doke, Arjun. "Delineation of the groundwater potential using remote sensing and GIS: a case study of Ulhas basin, Maharashtra, India." *Archi Photogramm Cartog Remote Sensing* 31 (2019).
11. Doke, Arjun B, Rajendra B Zolekar, Hemlata Patel, and Sumit Das, et al. "Geospatial mapping of groundwater potential zones using multi-criteria decision-making AHP approach in a hardrock basaltic terrain in India." *Ecol Indic* 127 (2021): 107685.
12. Gadrani, L, G Lominadze, and M Tsitsagi. "F assessment of landuse/landcover (LULC) changes of Tbilisi and surrounding area using remote sensing (RS) and GIS." *Ann Agrar Sci* 16 (2018): 163-169.

13. Greene, Randal, Rodolphe Devillers, Joan E Luther, and Brian G Eddy, et al. "GIS-based multiple-criteria decision analysis." *Geogr Compass* 5 (2011): 412-432.
14. Hussein, Abdul-Aziz, Vanum Govindu, and Amare Gebre Medhin Nigusse. "Evaluation of groundwater potential using geospatial techniques." *Appl Water Sci* 7 (2017): 2447-2461.
15. Ifediegwu, Stanley Ikenna. "Assessment of groundwater potential zones using GIS and AHP techniques: a case study of the Lafia district, Nasarawa State, Nigeria." *Appl Water Sci* 12 (2022): 10.
16. Jhariya, DC, Tarun Kumar, M Gobinath, and Prabhat Diwan, et al. "Assessment of groundwater potential zone using remote sensing, GIS and multi criteria decision analysis techniques." *J Geol Soc India* 88 (2016): 481-492.
17. Kaewdum, Narongsak, and Srilert Chotpantarot. "Mapping potential zones for groundwater recharge using a GIS technique in the lower Khwae Hanuman Sub-Basin Area, Prachin Buri Province, Thailand." *Front Earth Sci* 9 (2021): 717313.
18. Kumar, Tarun, Amar Kant Gautam, and Tinu Kumar. "Appraising the accuracy of GIS-based multi-criteria decision making technique for delineation of groundwater potential zones." *Water Resour Manag* 28 (2014): 4449-4466.
19. Abrar, Hamza, Abiyot Legesse Kura, Engida Esayas Dube, and Dereje Likisa Beyene, et al. "AHP based analysis of groundwater potential in the western escarpment of the Ethiopian rift valley." *Geol Ecol Landsc* 7 (2023): 175-188.
20. Magesh, Nochyil S, Nainarpandian Chandrasekar, and John Prince Soundranayagam. "Delineation of groundwater potential zones in Theni district, Tamil Nadu, using remote sensing, GIS and MIF techniques." *Geosci Front* 3 (2012): 189-196.

How to cite this article: Mekuria, Eyasu Tafese. "Groundwater Potential Zone Mapping of Lower Omo-Gibe Watershed, Omo-Gibe Basin, Ethiopia." *J Civil Environ Eng* 13 (2023): 528.